


VIEWING DIRECTION
↑

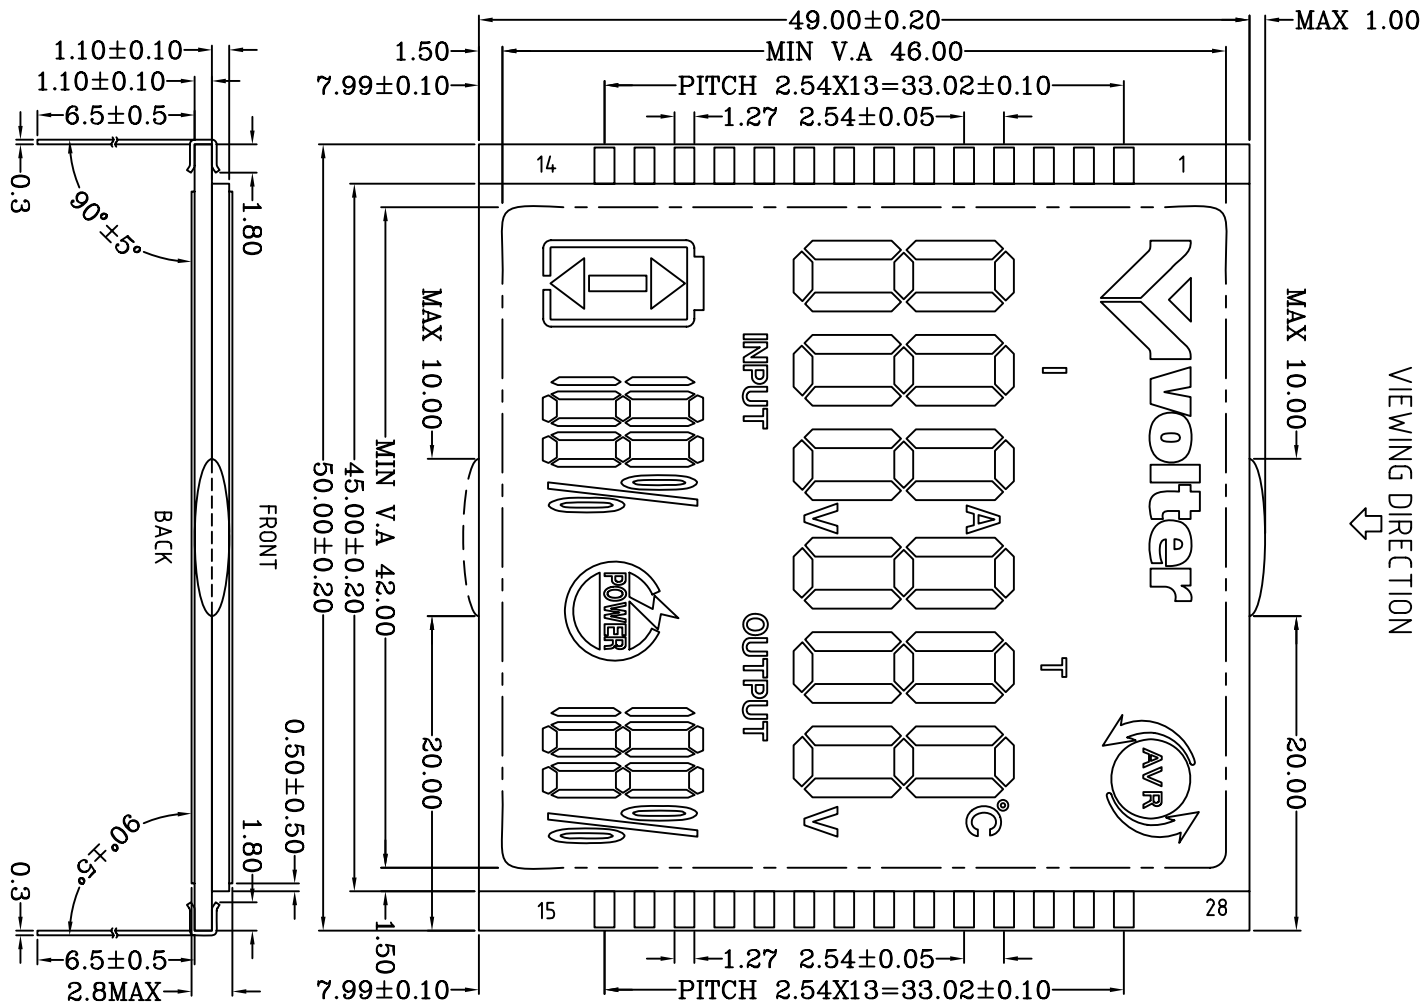


- NOTE:
- 1) ALL DIMENSION ARE IN mm WITH ±0.2
 - TOLERANCE OR OTHER SPECILTTY
 - 2) DISPLAY MODE : HTN/POSITIVE/TRANSMISSIVE
 - 3) VIEW ANGLE : 12 0' CLOCK
 - 4) DRIVE CONDITION : 1/4 DUTY 1/3 BIAS
 - 5) OPERATING VOLTAGE : 3.3 V
 - 6) OPERATING TEMP : 0°C TO +50°C
 - 7) STORAGE TEMP : -10°C TO +60°C
 - 8) CONNECT METHED : PIN


CROSS POINT ? PCS 0.06mm X 0.06mm IN V.A.

| REV. | DESCRIPTION | DATE |
|------|-------------|-----------|
| 01 | | 2011.8 |
| | 1 PCS | 2011-7-25 |

| | | | |
|--|------------------|----------|-----------|
| Faraday Electronics (Hong Kong) Co.Limited | | | |
| www.Faraday-el.com | | | |
| Drawn By: ZFL | MODEL NO: FH4993 | | |
| Checke By: | | | |
| Approved By: | REV NO: 01 | | |
| Draw By: 2011.8.8 | CUSTOMER NO: | | |
| | | UNIT: mm | PAGE: 1/3 |

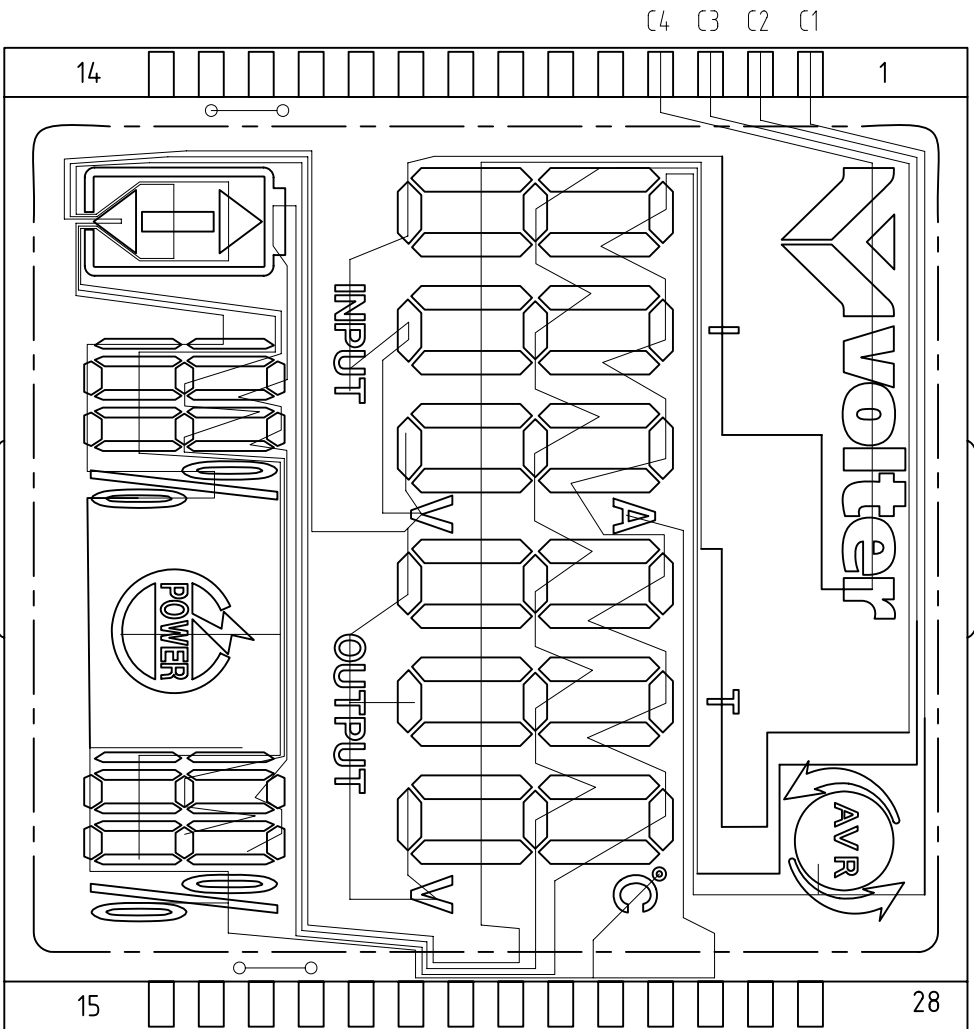


COM

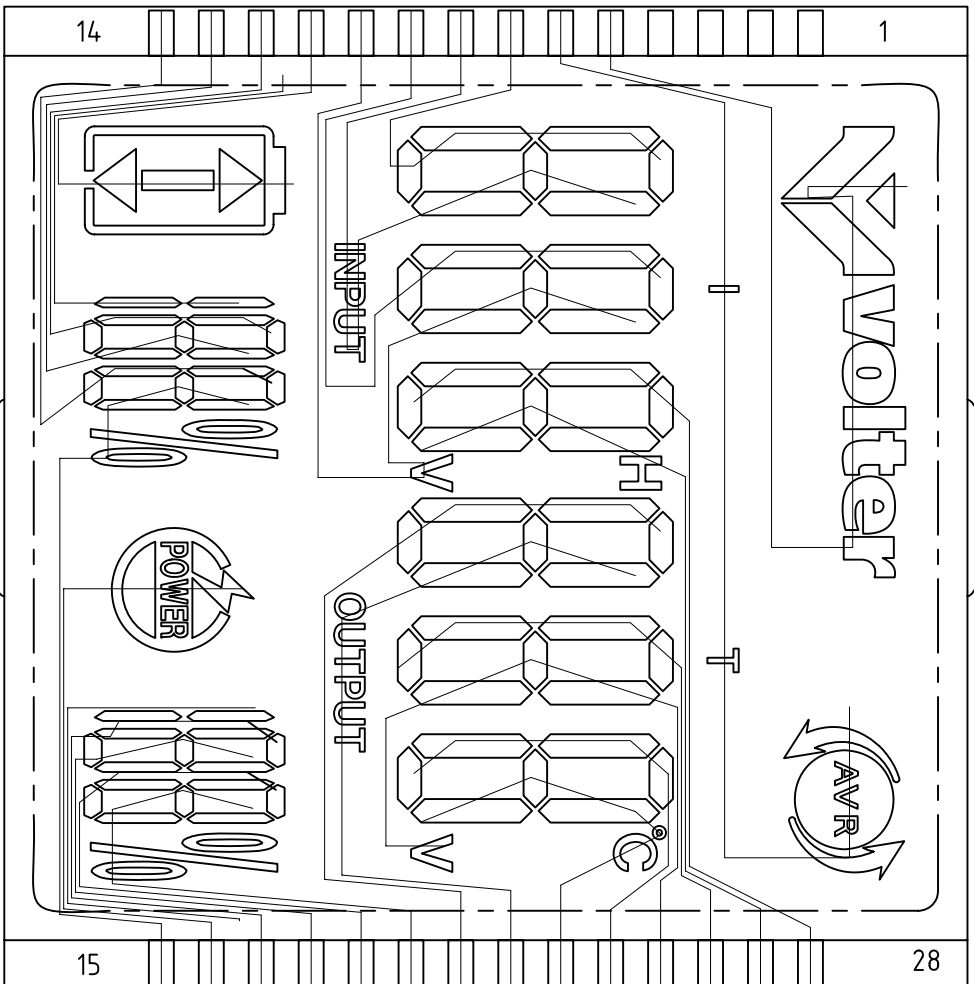


SEG

| | | |
|------------|--------|-----------|
| DRAW NO : | FH4993 | |
| DRAW NAME: | LAYOUT | |
| VER NO : | 01 | PAGE: 2/3 |

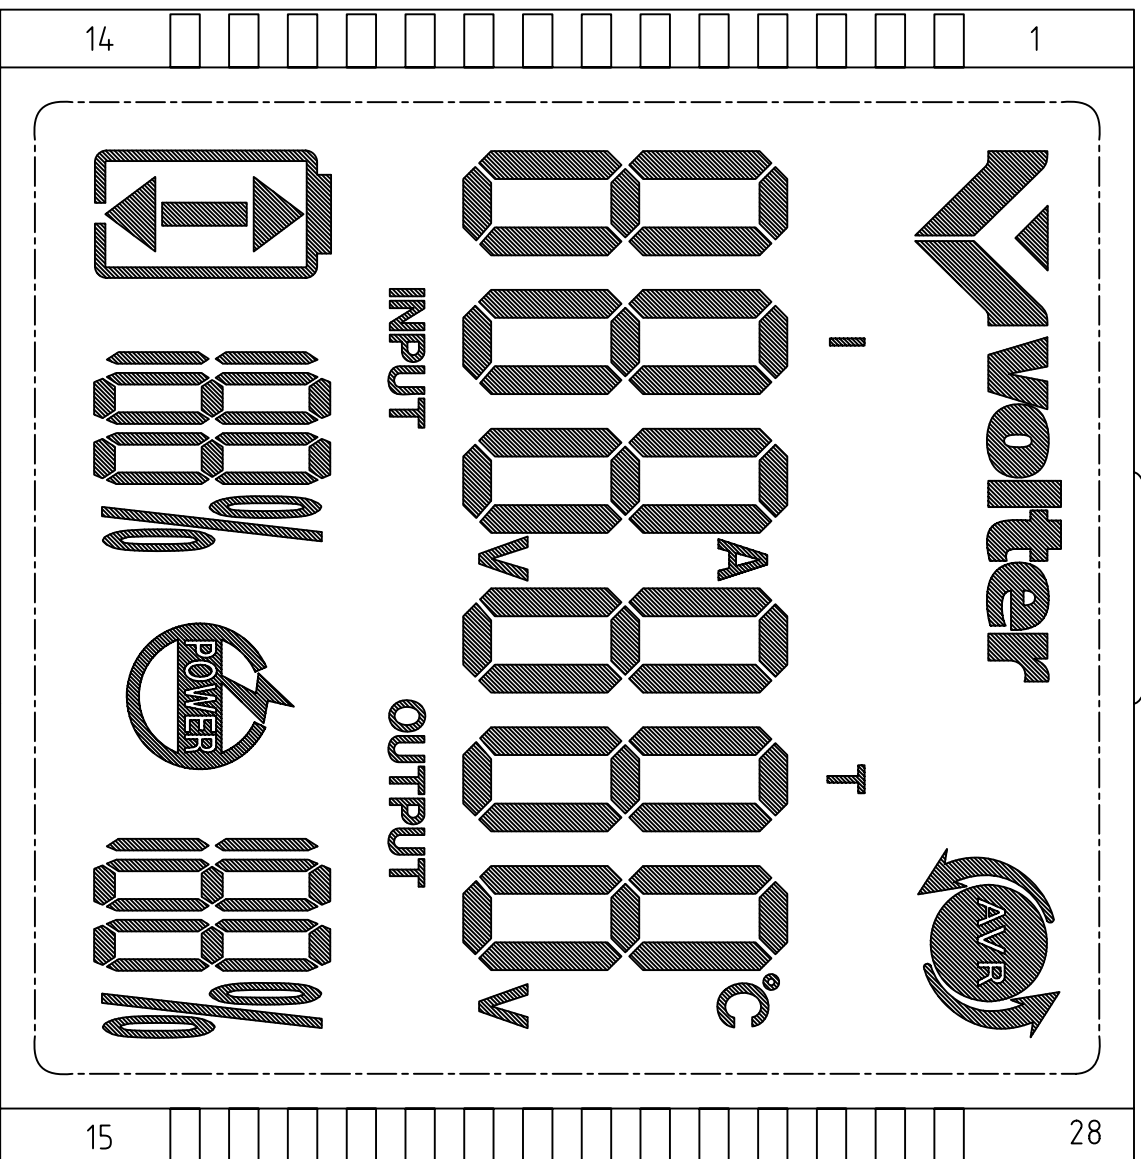

display ratio 3:1

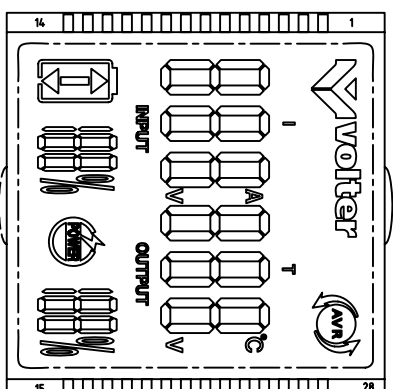

display ratio 1:1

DRAW NO.: FH4993

DRAW NAME: Display Ratio

VER NO : 01 PAGE: 3/3