


VIEWING DIRECTION  
↑

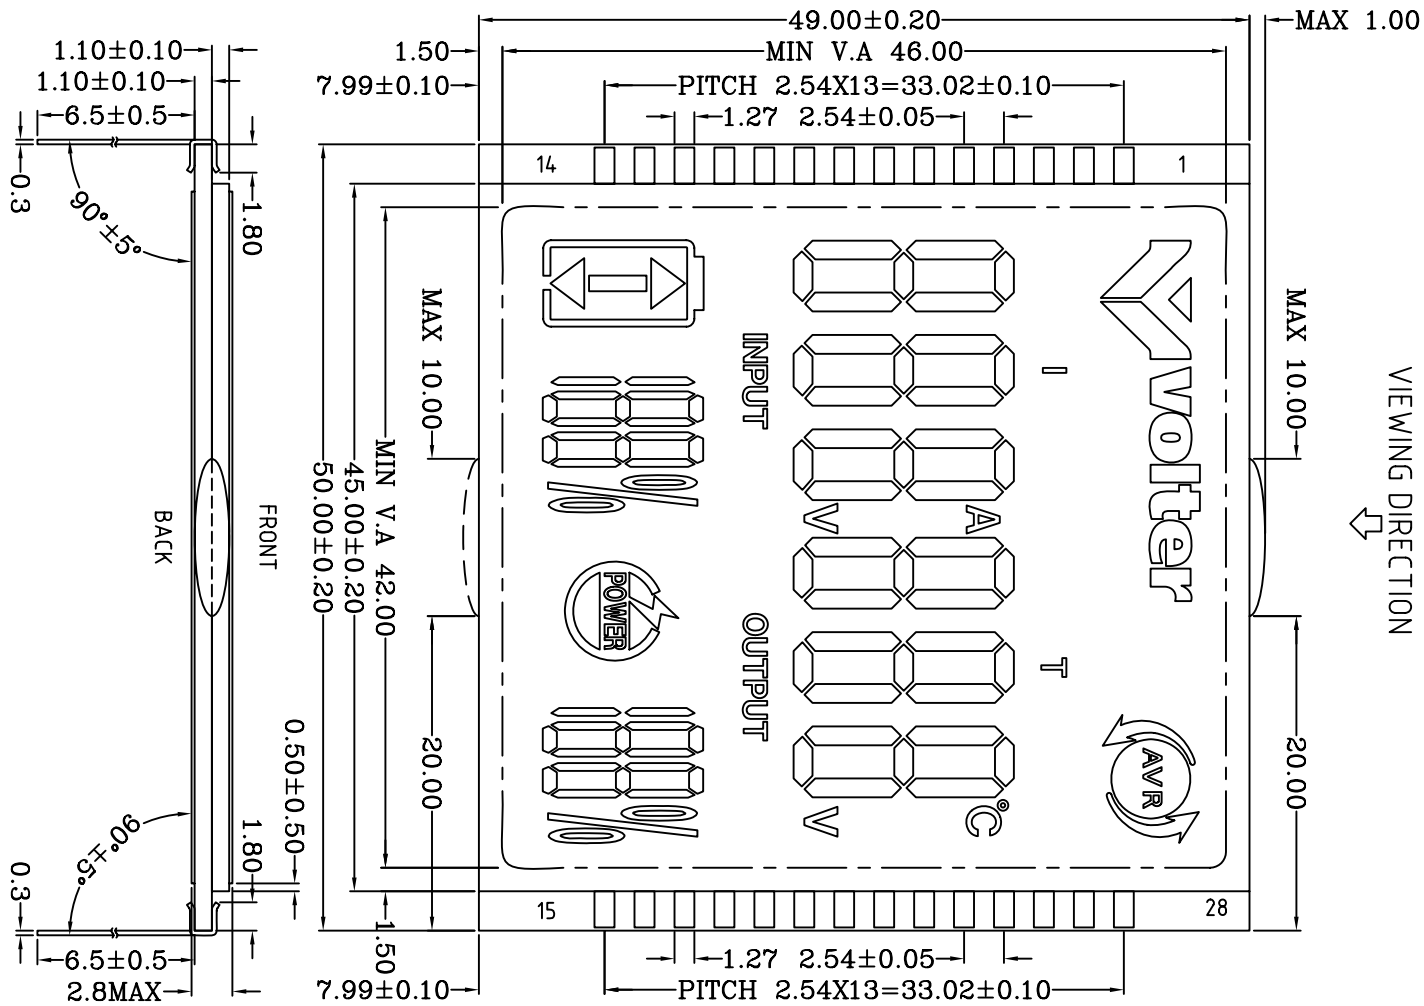


- NOTE:
- 1) ALL DIMENSION ARE IN mm WITH ±0.2
  - 2) TOLERANCE OR OTHER SPECIL TTY
  - 3) DISPLAY MODE : HTN/POSITIVE/TRANSMISSIVE
  - 4) VIEW ANGLE : 12 0' CLOCK
  - 5) DRIVE CONDITION : 1/4 DUTY 1/3 BIAS
  - 6) OPERATING VOLTAGE : 3.3 V
  - 7) OPERATING TEMP : 0°C TO +50°C
  - 8) STORAGE TEMP : -10°C TO +60°C
  - 9) CONNECT METHED : PIN


CROSS POINT ? PCS 0.06mm X 0.06mm IN V.A.

| REV. | DESCRIPTION | DATE      |
|------|-------------|-----------|
| 01   |             | 2011.8    |
|      | 1 PCS       | 2011-7-25 |

|  |                  |           |  |
|--|------------------|-----------|--|
| Faraday Electronics (Hong Kong) Co.Limited |                  |           |  |
| www.Faraday-el.com                         |                  |           |  |
| Drawn By: ZFL                              | MODEL NO: FH4993 |           |  |
| Checke By:                                 |                  |           |  |
| Approved By:                               | REV NO: 01       | UNIT: mm  |  |
| Draw By: 2011.8.8                          | CUSTOMER NO:     | PAGE: 1/3 |  |

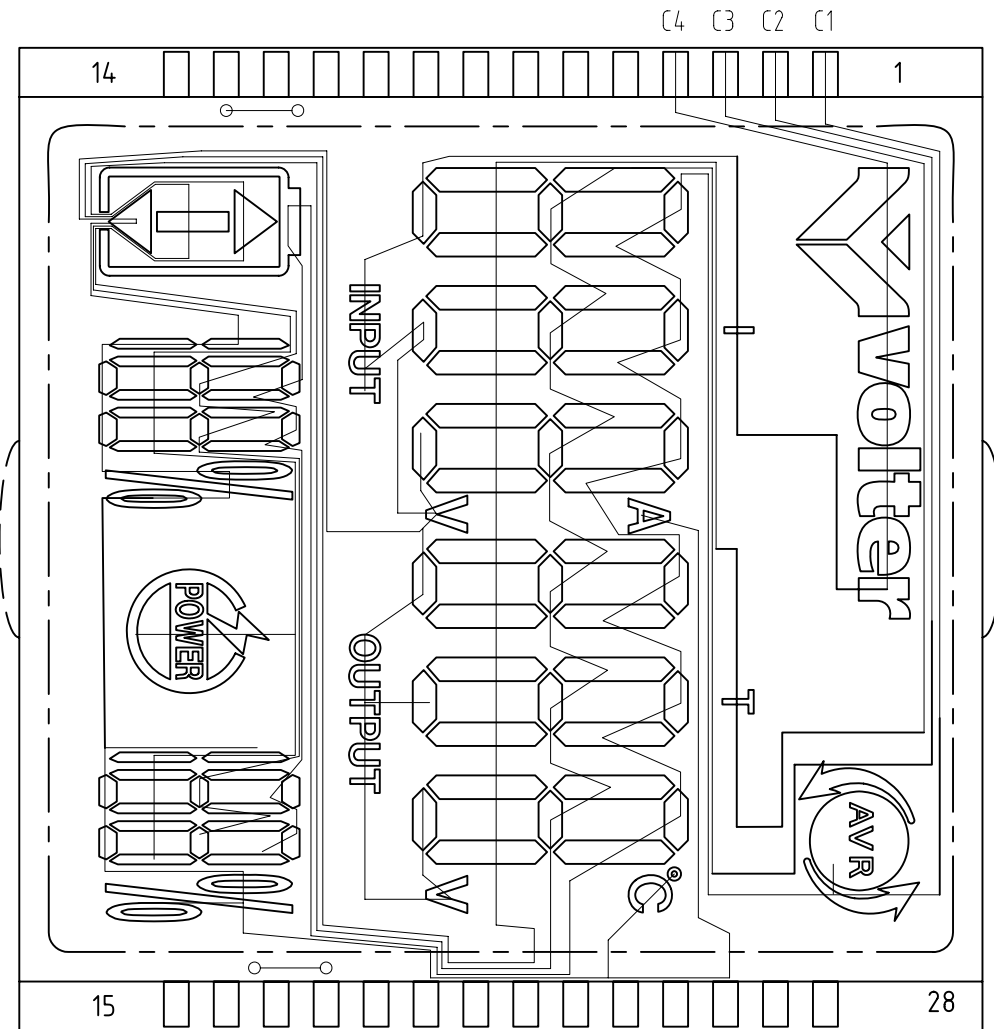


COM

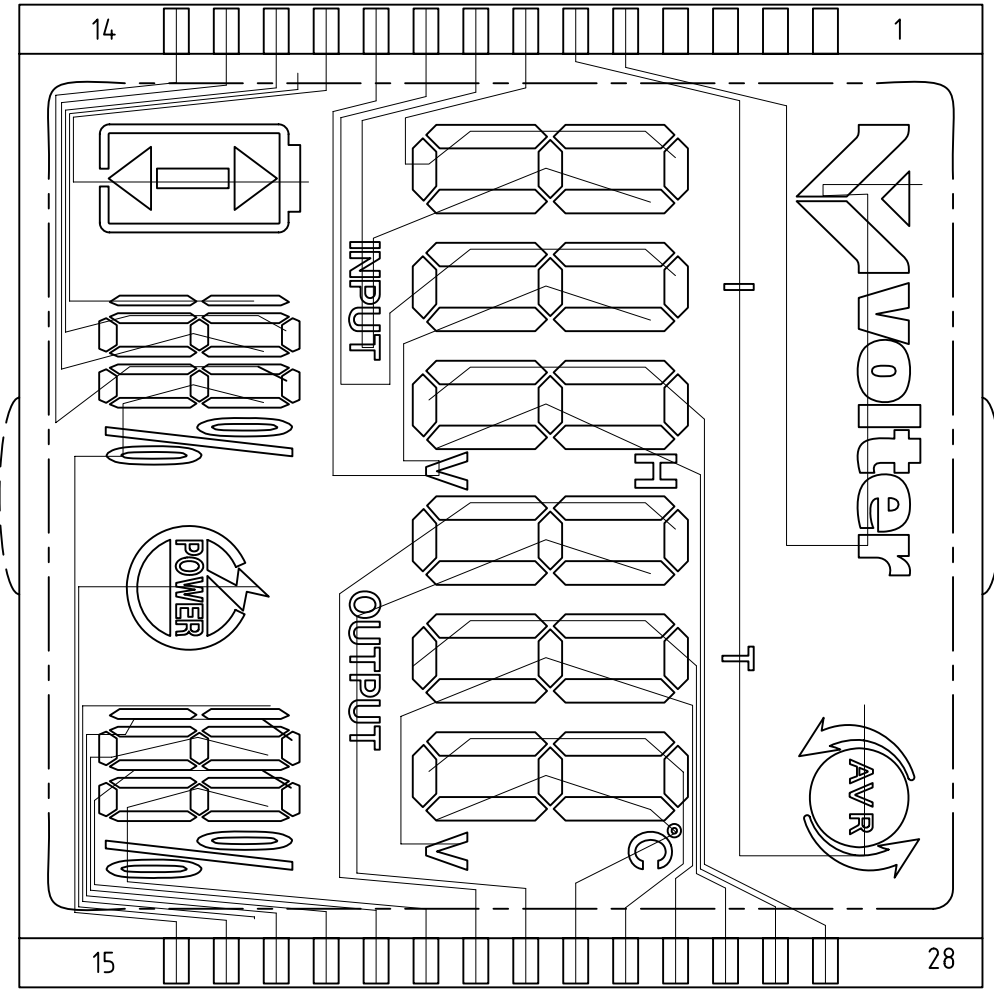


SEG

|            |        |
|------------|--------|
| DRAW NO :  | FH4993 |
| DRAW NAME: | LAYOUT |
| VER NO :   | 01     |
| PAGE:      | 2 / 3  |

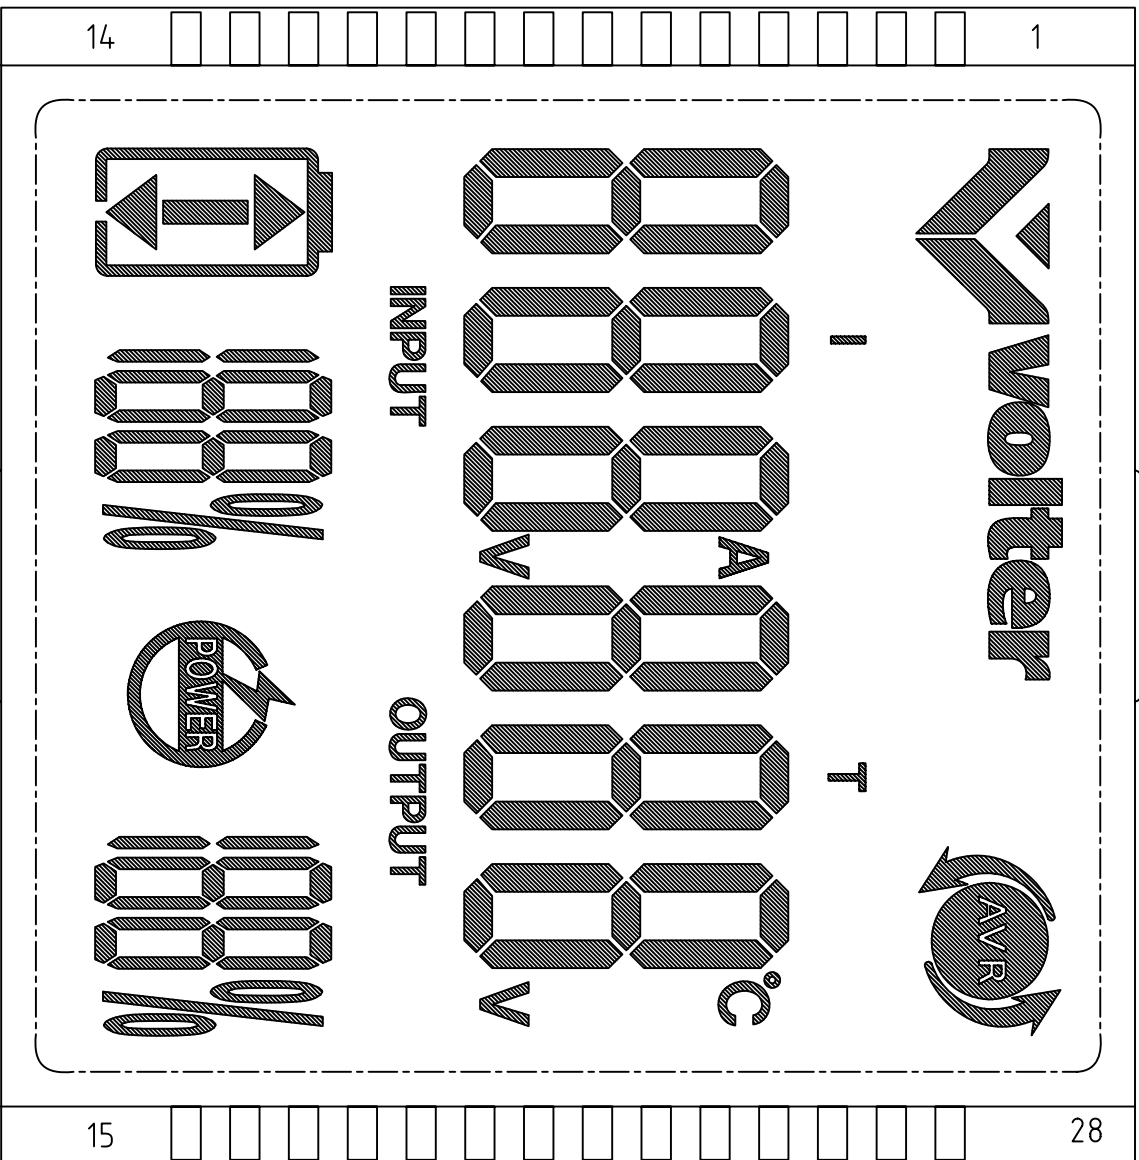

display ratio 3:1

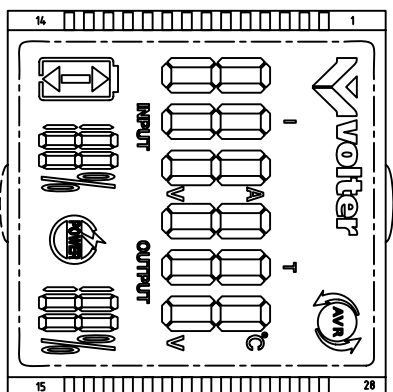

display ratio 1:1

|            |               |
|------------|---------------|
| DRAW NO.:  | FH4993        |
| DRAW NAME: | Display Ratio |
| VER NO :   | 01            |
| PAGE:      | 3 / 3         |